


**Panel Cut-Out**

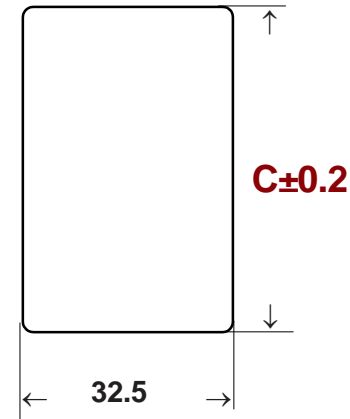

Panel Thickness	
1	1.5 mm
2	2.0 mm
3	2.5 mm

No. of Ports	L ± 0.5	I ± 0.3	C ± 0.2
2	55.5	51.5	51.8
3	79.5	75.5	75.8
4	103.5	99.5	99.8
5	127.5	123.5	123.8
6	151.5	147.5	147.8
7	.5	171.5	171.8

**Specifications:**

Contact Material: Nickel Plated Brass  
 Body Material: Nylon 6.6 94 V0  
 Manufacturers Specification: EN60320  
 UL 498

**Ratings:**

UL / CSA  
 Amperage: 15 Amp  
 Voltage: 125 Volt  
 International  
 Amperage: 10 Amp  
 Voltage: 250 Volt



675 S. Lively Blvd.  
 Elk Grove Village  
 Illinois 60007

**Agency Approvals**



CUSTOMER

PARTNO.

DATE:  
11.19.2004

Drawn By:  
J.Balck

**GENERAL SPECIFICATION**

PAGE: 1 OF 1

CHANGE ISSUE:

**Power Inlet IEC 320 - C00**

DWG.NO.  
**AEL-JR 301 2-7**  
REV. 0

APPROVED